

工厂灯 GC 11 | HIGHBAY LIGHT GC 11 ECO

100W/150W/200W/250W



- + 采用索田BOOST飞碟电源，电能转化率达95%以上；
- + 电源独立安装，避免热量在灯具内部积聚，减少光源和电路的热损耗；
- + 灯体采用太空铝材质，无铅无汞，低碳环保，美观坚固；
- + 智能感应，精准控光，人离开后自动熄灯，省电更省心；



- + Using Sotae BOOST UFO power supply, the energy conversion rate is up to 95%;
- + The power supply is installed independently to avoid heat accumulation inside the luminaire and reduce the heat loss of the light source and the circuit;
- + The lamp body is made of space aluminum, lead-free and mercury-free, low-carbon and environmentally protection, beautiful and strong;
- + Intelligent sensing, accurate light control, automatic lights out after leaving, save power,save hassle;



产品尺寸(mm) PRODUCT SIZE

	100W	150W	200W	250W
H	130	130	130	130
H1	105	105	105	105
d	340	403	403	403

配光曲线 LIGHT DISTRIBUTION CURVE

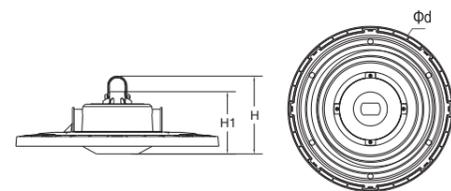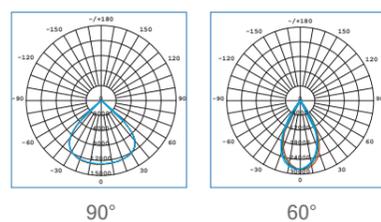


产品参数 PRODUCT PARAMETERS

	100W	150W	200W	250W
系统功率 System power (W)	100	150	200	250
系统输出 System output (Lm)	17000	25500	34000	42500
系统效率 Efficacy (Lm/W)	170Lm/w			
色温 Color temperature (K)	4000K/5700K/6500K			
显指 CRI (Ra)	80			
输入电压 Input voltage	220-240V/50-60Hz			
功率因素 PF	0.9			
发光角度 Beam angle	60°/90°			
防护等级 IP	IP65			
冲击力等级 IK	IK06			
电源 Driver	DC DRIVER			
电器等级 Electrical appliance class	Class I			
适用环境温度 Applicable ambient temperature	-20°C~45°C			
浪涌等级 Surge grade	L-N 3KV, L/N-PE 3KV			
灯具寿命 Luminaire lifespan	30000hs@Lm70 , Ta35°C			

工厂灯 GC62 | HIGHBAY LIGHT GC62 ECO

100W/150W/200W

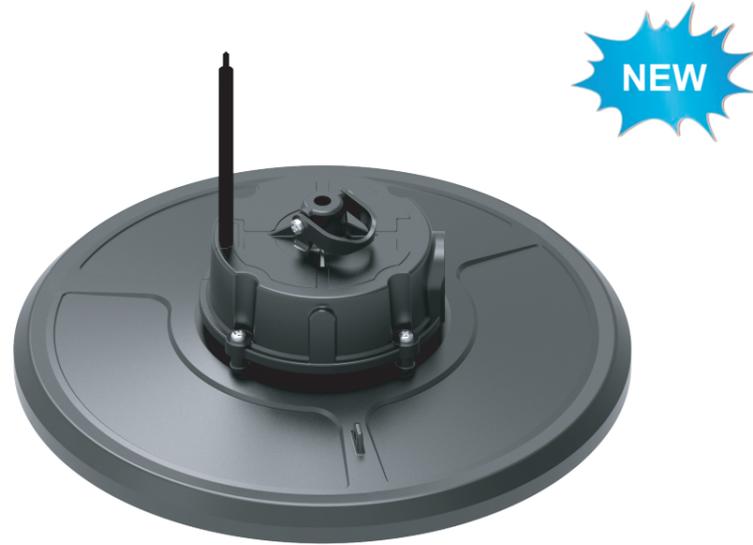


- + 采用索田BOOST飞碟电源，电能转化率达95%以上；
- + 电源独立安装，避免热量在灯具内部积聚，减少光源和电路的热损耗；
- + 电源内置拨码，可调功率、亮度、色温，三种功能均可独立使用，满足不同场景需求；
- + 灯体采用太空铝材质，无铅无汞，低碳环保，美观坚固；
- + 智能感应，精准控光，人离开后自动熄灯，省电更省心；


- + Using Sotae BOOST UFO power supply, the energy conversion rate is up to 95%;
- + The power supply is installed independently to avoid heat accumulation inside the luminaire and reduce the heat loss of the light source and the circuit;
- + Power supply built-in dip switch, adjustable power, brightness, color temperature, three functions can be used independently, Meet the needs of different scenarios;
- + The lamp body is made of space aluminum, lead-free and mercury-free, low-carbon and environmentally protection, beautiful and strong;
- + Intelligent sensing, accurate light control, automatic lights out after leaving, save power, save hassle;

产品尺寸(mm) PRODUCT SIZE

	100W	150W	200W
H	92	99	99
W	230	270	300
d	230	270	300

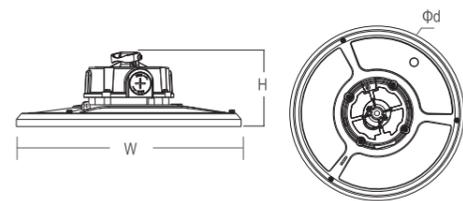

配光曲线 LIGHT DISTRIBUTION CURVE

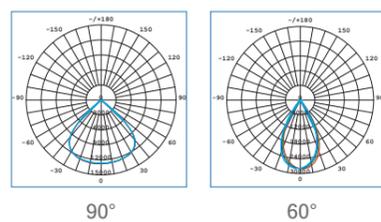

产品参数 PRODUCT PARAMETERS

	100W	150W	200W
系统功率 System power (W)	100	150	200
系统输出 System output (Lm)	18000/15000	27000/22500	36000/30000
系统效率 Efficacy (Lm/W)	180Lm/w@5000K 150Lm/w@4000K/6500K		
色温 Color temperature (K)	4000K/5000K/6500K		
显指 CRI (Ra)	80		
输入电压 Input voltage	220-240V/50-60Hz		
功率因素 PF	0.95		
发光角度 Beam angle	90°/60°		
防护等级 IP	IP65		
冲击力等级 IK	IK06		
电源 Driver	DC DRIVER		
电器等级 Electrical appliance class	Class I		
适用环境温度 Applicable ambient temperature	-20°C~35°C		
浪涌等级 Surge grade	L-N 4KV, L/N-PE 4KV		
灯具寿命 Luminaire lifespan	30000hs@Lm70, Ta35°C		



工厂灯 GC91 | HIGHBAY LIGHT GC91 THE ECO

100W/150W/200W



NEW




功率调节 power adjustable
色温调节 color temperature adjustable
亮度调节 brightness adjustable

- + 采用索田BOOST飞碟电源，电能转化率达95%以上；
- + 电源独立安装，避免热量在灯具内部积聚，减少光源和电路的热损耗；
- + 电源内置拨码，可调功率、亮度、色温，三种功能均可独立使用，满足不同场景需求；
- + 灯体采用太空铝材质，无铅无汞，低碳环保，美观坚固；
- + 智能感应，精准控光，人离开后自动熄灯，省电更省心；



- + Using Sotae BOOST UFO power supply, the energy conversion rate is up to 95%;
- + The power supply is installed independently to avoid heat accumulation inside the luminaire and reduce the heat loss of the light source and the circuit;
- + Power supply built-in dip switch, adjustable power, brightness, color temperature, three functions can be used independently, Meet the needs of different scenarios;
- + The lamp body is made of space aluminum, lead-free and mercury-free, low-carbon and environmentally protection, beautiful and strong;
- + Intelligent sensing, accurate light control, automatic lights out after leaving, save power, save hassle;

产品尺寸(mm) PRODUCT SIZE

	100W	150W	200W
H	90	93	95
W	245	290	318
d	245	290	318

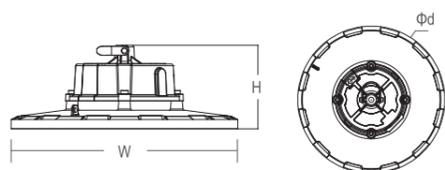

配光曲线 LIGHT DISTRIBUTION CURVE

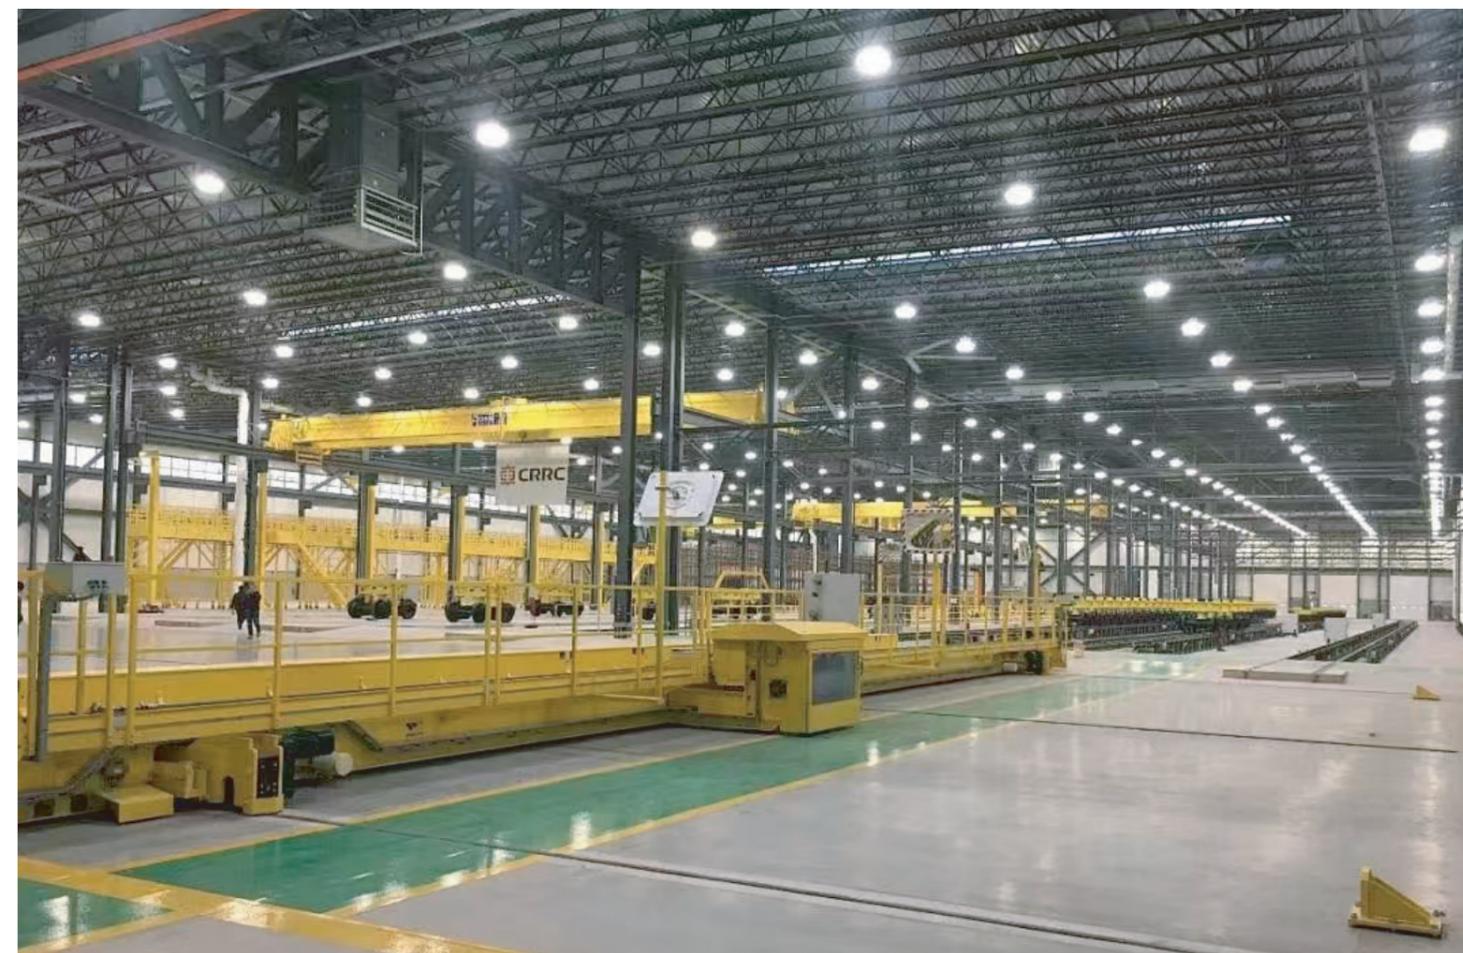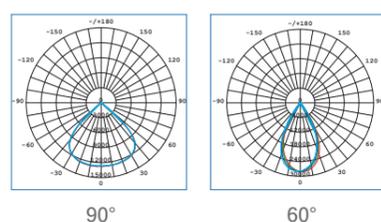

产品参数 PRODUCT PARAMETERS

	100W	150W	200W
系统功率 System power (W)	100	150	200
系统输出 System output (Lm)	18000/15000	27000/22500	36000/30000
系统效率 Efficacy (Lm/W)	180Lm/w@5000K 150Lm/@4000K/6500K		
色温 Color temperature (K)	4000K/5000K/6500K		
显指 CRI (Ra)	80		
输入电压 Input voltage	220-240V/50-60Hz		
功率因素 PF	0.95		
发光角度 Beam angle	90°/60°		
防护等级 IP	IP65		
冲击力等级 IK	IK06		
电源 Driver	DC DRIVER		
电器等级 Electrical appliance class	Class I		
适用环境温度 Applicable ambient temperature	-20°C~35°C		
浪涌等级 Surge grade	L-N 4KV, L/N-PE 4KV		
灯具寿命 Luminaire lifespan	30000hs@Lm70, Ta35°C		

适用环境温度 -25 35
防护等级 IP65

路灯 LD1 | STREET LIGHT LD1 PLUS PRO

100W/150W/200W




- + 一体式工业化设计，安装、维护更便捷；
- + 内置角度调节功能；
- + 采用高亮灯珠，发光柔和均匀；
- + 灯体采用太空铝材质，无铅无汞，低碳环保，美观坚固。


- + Integrated industrial design makes installation and maintenance more convenient ;
- + Built-in Angle adjustment function;
- + Using high-light beads, the light is soft and uniform;
- + The lamp body is made of space aluminum material, lead-free and mercury-free, low carbon and environmental protection, beautiful and strong.

产品尺寸 PRODUCT SIZE (mm)

	Small 100W	Medium 150W	Large 200W
L	526	592	666
W	190	220	250
H	130	130	130

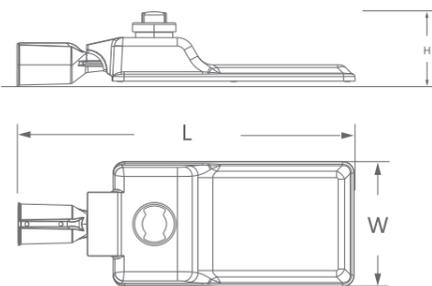

配光曲线 LIGHT DISTRIBUTION CURVE



TYPE II

通用环境温度



防护等级

IP66



产品参数 PRODUCT PARAMETERS

	100W	150W	200W
系统功率 System power(W)	100W	150W	200W
系统输出 System output (Lm)	15000	22500	30000
系统效率 Efficacy (Lm/W)	150		
色温 Color temperature (K)	3000K/4000K/5700K		
显指 CRI (Ra)	80		
输入电压 Input voltage	100-277V		
功率因素 PF	0.95		
发光角度 Beam angle	TYPE II		
防护等级 IP	IP66		
冲击力等级 IK	IK08		
电源 Driver	LAC-NA		
电器等级 Electrical appliance class	Class I		
适用环境温度 Applicable ambient temperature	-40°C~+50°C		
浪涌等级 Surge grade	10/10带SPD		
灯具寿命 Luminaire lifespan	50000hrs @Lm70/B50-Ta35°C		

路灯 LD2 | STREET LIGHT LD2 PLUS PRO

100W/150W/200W




- + 翻盖式电源腔体，安装、维护更便捷；
- + 内置角度调节功能；
- + 采用高亮灯珠，发光柔和均匀；
- + 灯体采用太空铝材质，无铅无汞，低碳环保，美观坚固。


- + The flip-top power supply cavity makes installation and maintenance more convenient;
- + Built-in Angle adjustment function;
- + Using high-light beads, the light is soft and uniform;
- + The lamp body is made of space aluminum material, lead-free and mercury-free, low carbon and environmental protection, beautiful and strong.

产品尺寸 PRODUCT SIZE (mm)

	Small 100W	Medium 150W	Large 200W
L	562	639	715
W	192	221	256
H	125	125	125

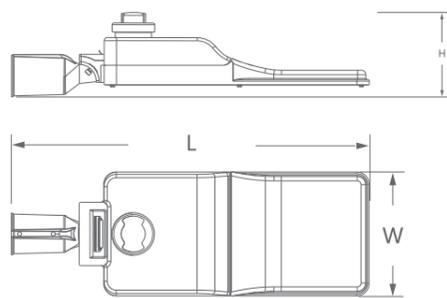

配光曲线 LIGHT DISTRIBUTION CURVE




TYPE II

适用环境温度



防护等级

IP66

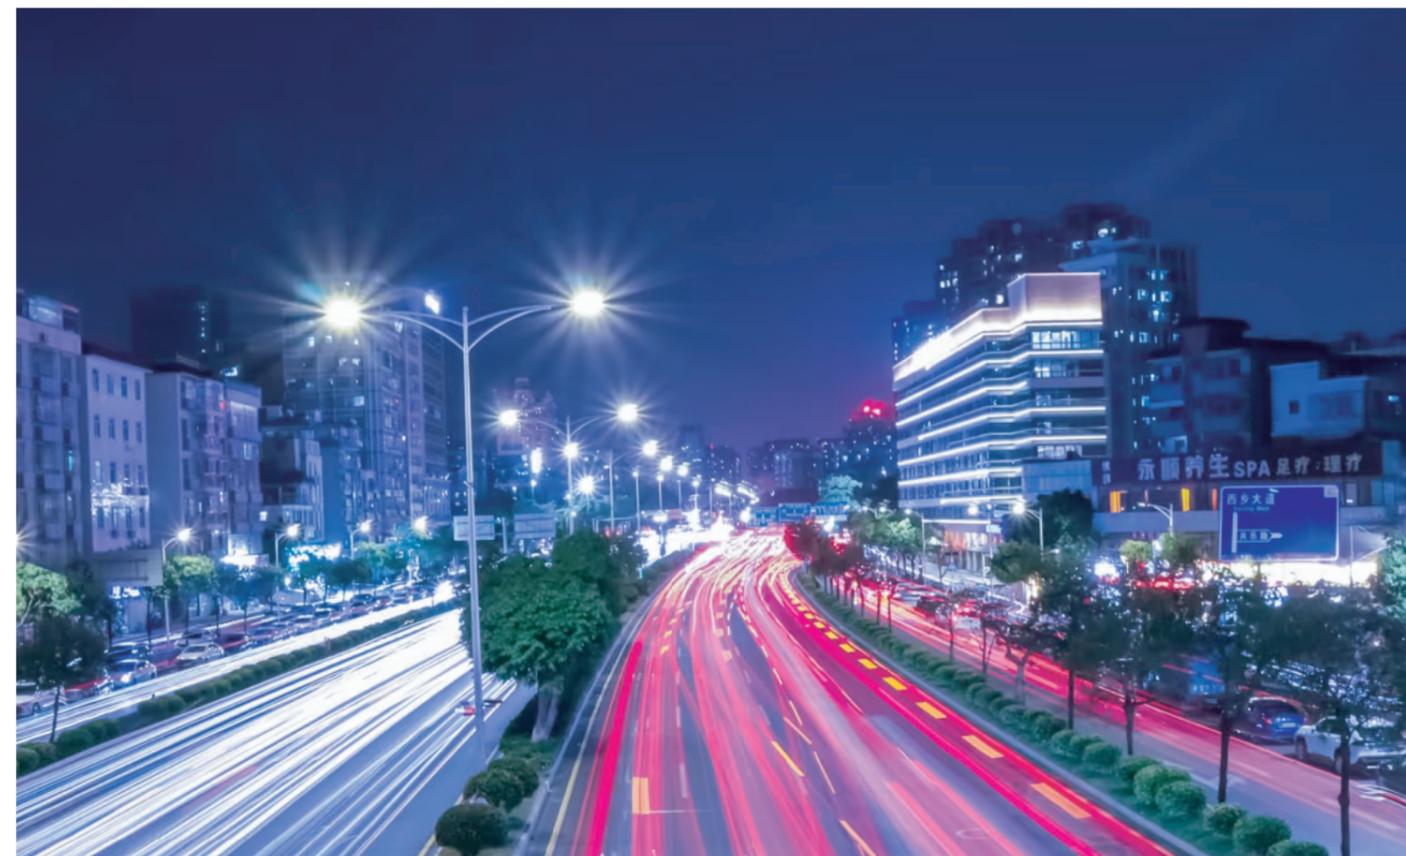

产品参数 PRODUCT PARAMETERS

	100W	150W	200W
系统功率 System power (W)	100W	150W	200W
系统输出 System output (Lm)	18000	27000	36000
系统效率 Efficacy (Lm/W)	180		
色温 Color temperature (K)	3000K/4000K/5700K		
显指 CRI (Ra)	80		
输入电压 Input voltage	100-277V		
功率因素 PF	0.95		
发光角度 Beam angle	TYPE II		
防护等级 IP	IP66		
冲击力等级 IK	IK08		
电源 Driver	LAC-NA		
电器等级 Electrical appliance class	Class I		
适用环境温度 Applicable ambient temperature	-40°C~+50°C		
浪涌等级 Surge grade	10/10带SPD		
灯具寿命 Luminaire lifespan	50000hrs @Lm70/B50-Ta35°C		

路灯 LD228 | STREET LIGHT LD228 PLUS PRO

100W/150W/200W/250W



上盖旋转45°后,可斜向上拔出
After rotating the upper cover 45°, it can be pulled out obliquely upward



压板旋转90°后,可徒手更换光源板
After rotating the pressure plate 90°, can replace the pcb board



- + 灯体可拆卸工业设计, 安装、维护更便捷;
- + 内置角度调节功能;
- + 采用高亮灯珠, 发光柔和均匀;
- + 灯体采用太空铝材质, 无铅无汞, 低碳环保, 美观坚固。

- + The lamp body can be disassembled industrial design, more convenient installation and maintenance;
- + Built-in Angle adjustment function;
- + Using high-light beads, the light is soft and uniform;
- + The lamp body is made of space aluminum material, lead-free and mercury-free, low carbon and environmental protection, beautiful and strong.

产品尺寸 PRODUCT SIZE (mm)

	Small 100W	Medium 150W	Large 200W/250W
L	680	737	890
W	250	294	345
H	107	107	107

配光曲线 LIGHT DISTRIBUTION CURVE



TYPE II

适用环境温度



防护等级

IP66




产品参数 PRODUCT PARAMETERS

	100W	150W	200W	250W
系统功率 System power (W)	100W	150W	200W	250W
系统输出 System output (Lm)	18000	27000	36000	45000
系统效率 Efficacy (Lm/W)	180			
色温 Color temperature (K)	3000K/4000K/5700K			
显指 CRI (Ra)	80			
输入电压 Input voltage	100-277V			
功率因素 PF	0.95			
发光角度 Beam angle	TYPE II			
防护等级 IP	IP66			
冲击力等级 IK	IK08			
电源 Driver	MOSO X6 series			
电器等级 Electrical appliance class	Class I			
适用环境温度 Applicable ambient temperature	-40°C~+50°C			
浪涌等级 Surge grade	10/10带SPD			
灯具寿命 Luminaire lifespan	50000hrs @Lm70/B50-Ta35°C			

隧道灯 SD600 | TUNNEL LIGHT SD600 STD


50~250W

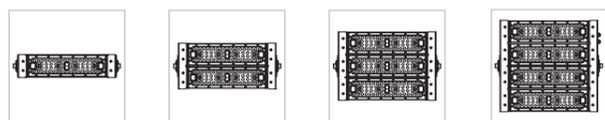

- + 采用高效、安全稳定的LED芯片；
- + 铝材鳞片增大散热面积，保障效率，安全稳定；
- + 光线通过球面聚光透镜，更亮更均匀；
- + 严密防护处理，防水等级达IP65；
- + 自制BOOST驱动，效率高达96%。



- + High light efficiency, safe and stable LED chip;
- + Aluminum flake to increase heat dissipation area, ensure efficiency, safety and stability;
- + The light is brighter and more uniform through the spherical condenser lens;
- + Strict protection treatment, waterproof class up to IP65;
- + Selfmade boost driver, efficiency up to 96%.

配光曲线 LIGHT DISTRIBUTION CURVE



产品尺寸(mm) PRODUCT SIZE

	50W	100W	150W	200W	250W
L	309	309	309	309	309
W	75	149	224	299	373
H	182	182	182	182	182
L1	150	150	150	150	150
D	13	13	13	13	13
a	13	13	13	13	13
b	32	32	32	32	32

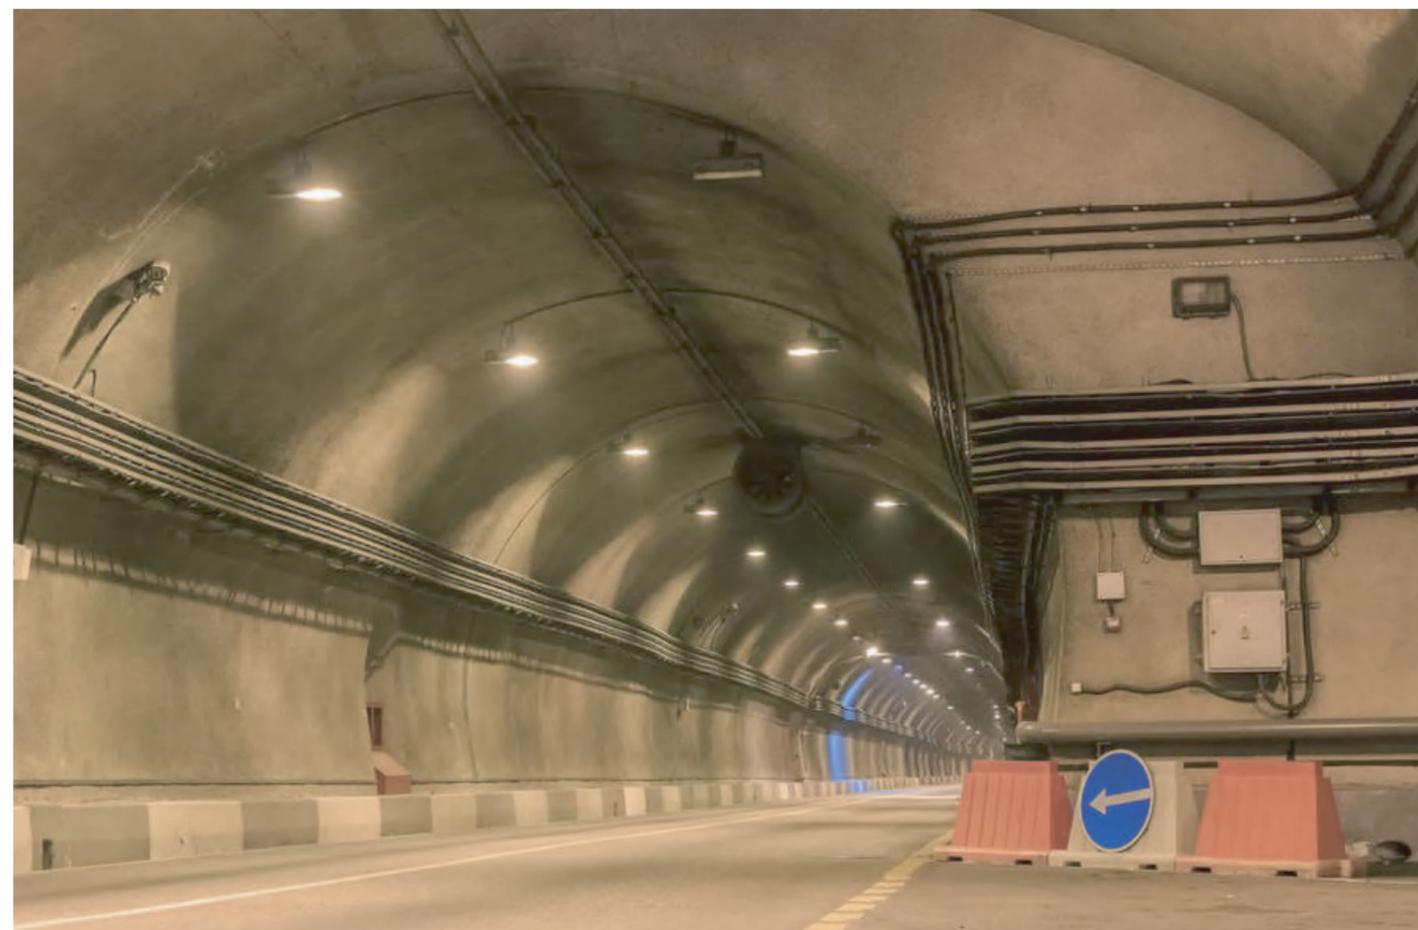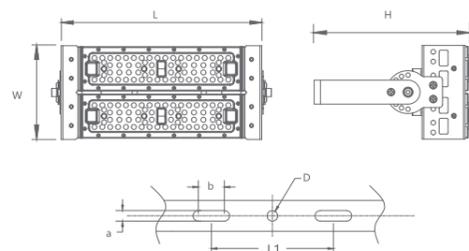

产品参数 PRODUCT PARAMETERS

	50W	100W	150W	200W	250W
电源 Driver	DC DRIVER				
系统功率 System power (W)	50	100	150	200	250
系统输出 System output (Lm)	6500	13000	19500	26000	32500
系统效率 Efficacy (Lm/W)	130				
色温 Color temperature (K)	3000K/4000K/5700K				
显指 CRI (Ra)	80				
输入电压 Input voltage	220-240V/50-60Hz				
功率因素 PF	0.95				
发光角度 Beam angle	90°				
防护等级 IP	IP65				
冲击力等级 IK	IK06				
电器等级 Electrical appliance class	Class I				
适用环境温度 Applicable ambient temperature	-20° ~ 50°				
浪涌等级 Surge grade	L-N:2KV L/N-PE:4KV				
灯具寿命 Luminaire lifespan	20000hs@Lm70, Ta35°				

球场/码头/高杆照明 ZY11 STD



COURT/DOCK/HIGH POLE LIGHTING ZY11

450W/600W/900W/1200W



- + 专为大型城市广场等高杆照明环境设计，极简的外观，超高的性价比；
 - + 高浪涌防护10KV,使灯具可以再交高的灯杆上使用；
 - + 4mm钢化玻璃，整灯IP65防护，灯具更耐用；
 - + 设计寿命为50000小时；工期内不用换灯。
- + Designed specifically for high-pole lighting environments such as large urban squares, it features a minimalist appearance and is super , high cost performance;
 - + High surge protection 10KV,so that the lights can be used on the high pole ;
 - + 4mm toughened glass,IP65,lamp is more durable;
 - + Lifespan is 50000 hours,do not have to change the lamp during the construction period.

配光曲线 LIGHT DISTRIBUTION CURVE

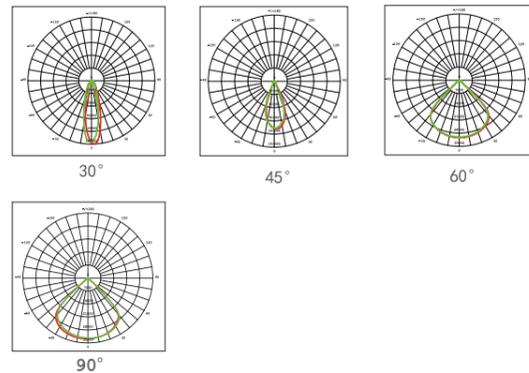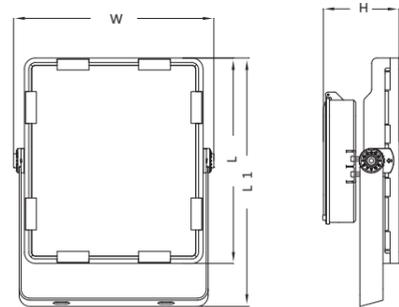

产品尺寸(mm) PRODUCT SIZE

	450W	600W	900W	1200W
W	376	717	752	1434
L	386	486	386	486
L1	467	567	467	567
H	143	143	143	143



产品参数 PRODUCT PARAMETERS

	450W	600W	900W	1200W
电源 Driver	DC DRIVER			
系统功率 System power (W)	450	600	900	1200
系统效率 Efficacy (Lm/W)	150Lm/w			
色温 Color temperature (K)	4000K/5700K/6000K			
显指 CRI (Ra)	80			
输入电压 Input voltage	220-240V/50-60Hz			
功率因素 PF	0.9			
发光角度 Beam angle	30°/45°/60°/90°			
防护等级 IP	IP65			
冲击力等级 IK	IK08			
电器等级 Electrical appliance class	Class I			
适用环境温度 Applicable ambient temperature	-40° ~ 45°			
浪涌等级 Surge grade	L-N:10KV L/N-PE:10KV			
灯具寿命 Luminaire lifespan	50000hs@Lm70 , Ta35°			